
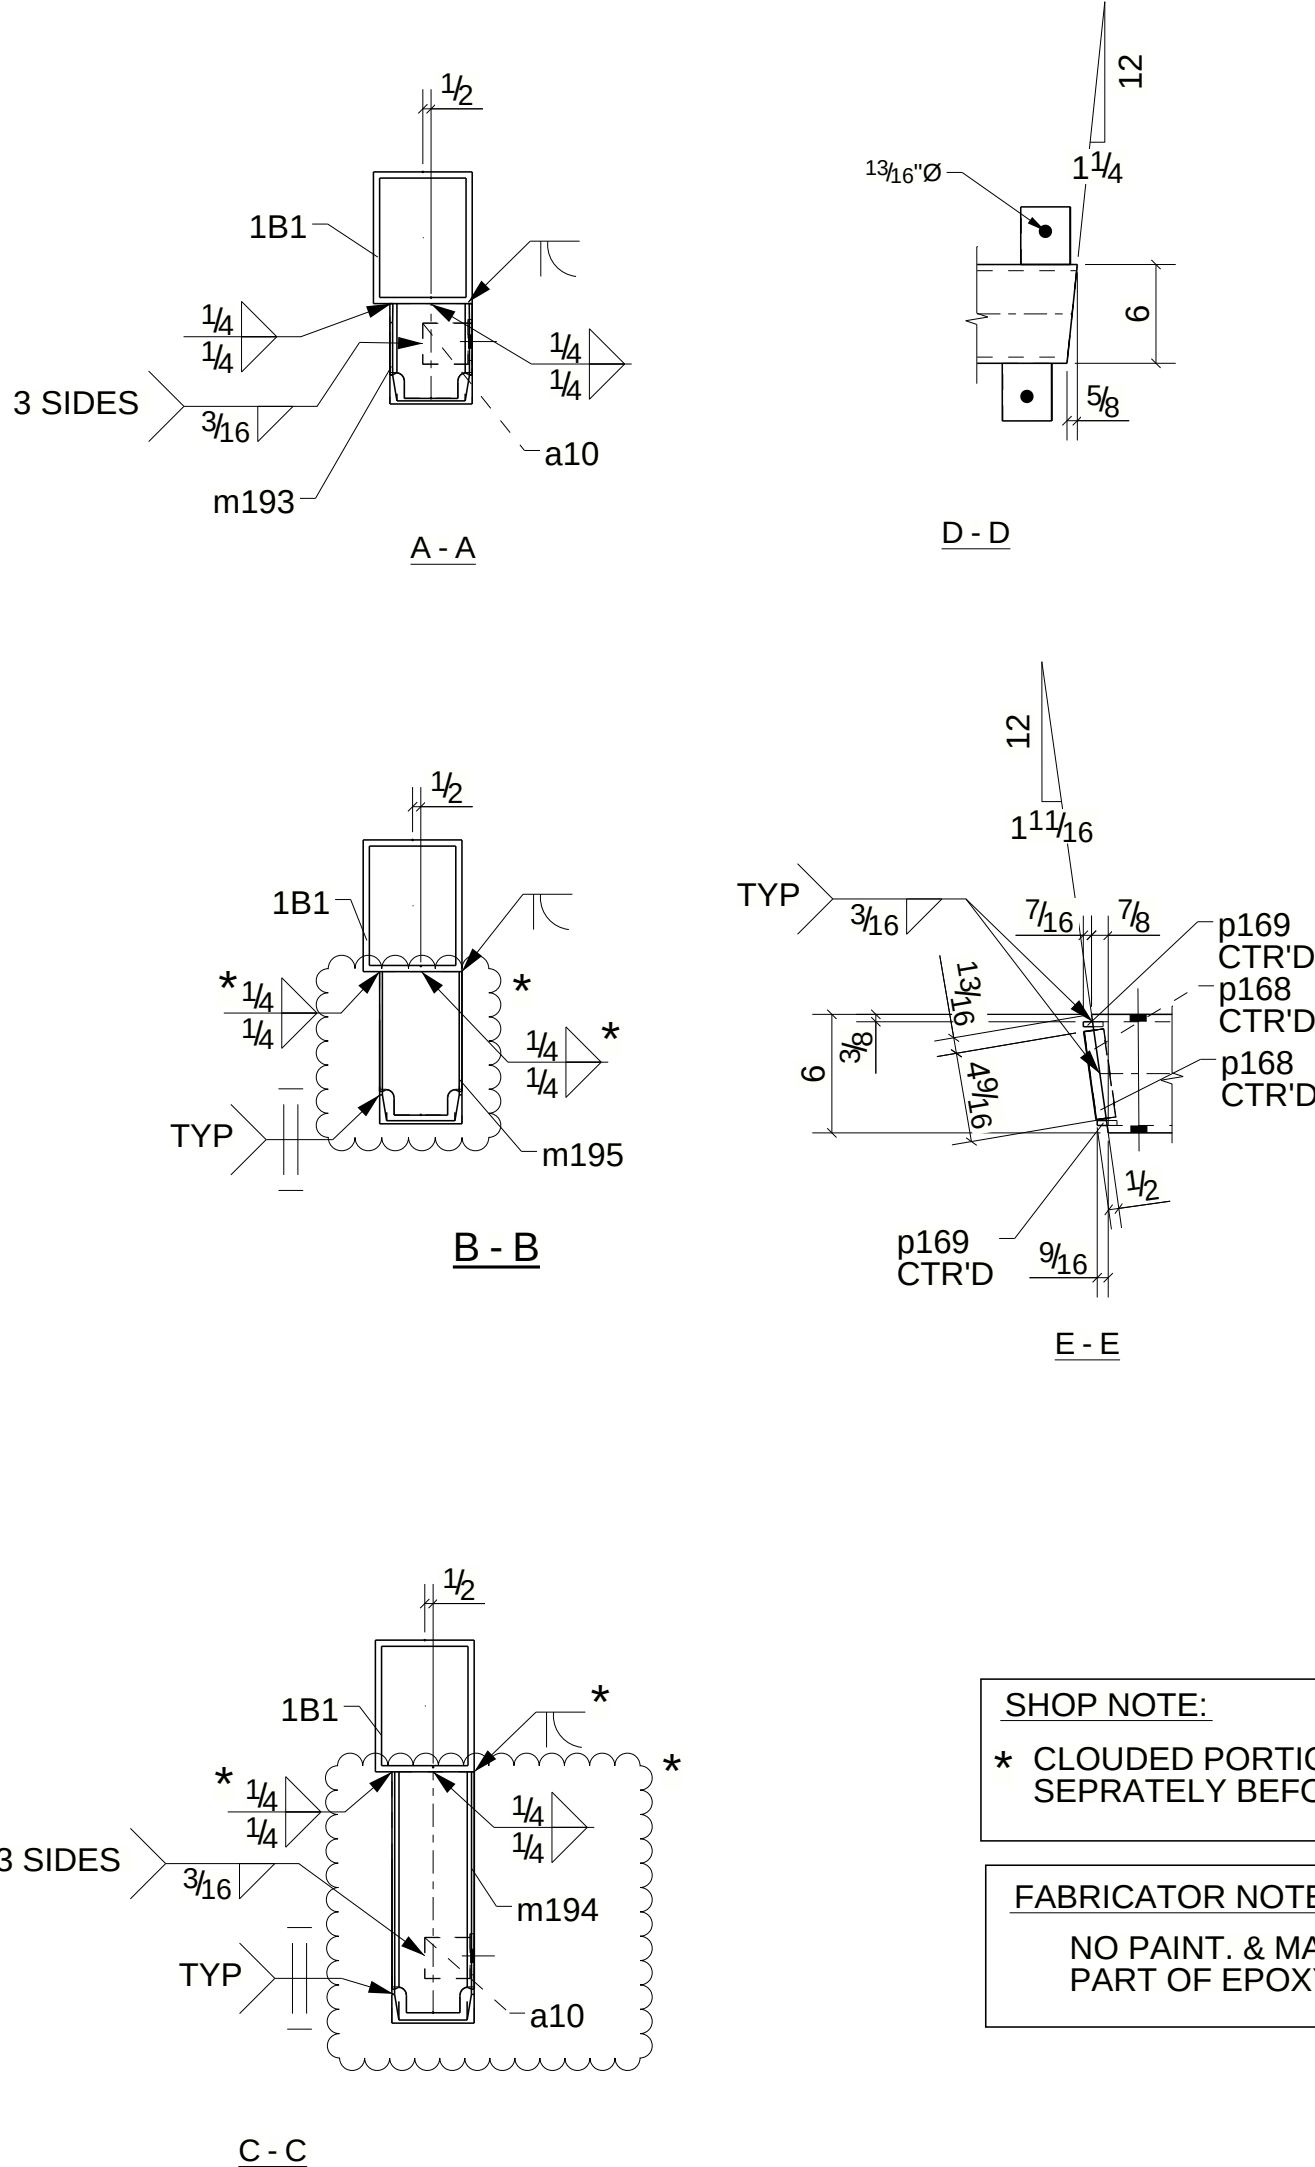


BILL OF MATERIAL							
MARK	TOTAL QTY	SHAPE	LENGTH	TOTAL WEIGHT	REMARKS	ADV MILL #	STEEL GRADE
1B1	1	HSS8X6X3/8	18'-2 1/16"	555	BEV-2 GALV		A500-GR B
a10	2	L3X3X1/4	0'-2 1/2"	2			A36
m192	1	C5X6.7	10'-6"	70			A36
m193	1	C5X6.7	0'-5 7/8"	3			A36
m194	1	C5X6.7	1'-2 13/16"	8			A36
m195	1	C5X6.7	0'-8 7/8"	5			A36
m196	1	C5X6.7	0'-11 13/16"	7			A36
p53	2	PL3/8"X3"	0'-3 1/2"	2			A36
p168	2	PL1/4"X1"	0'-4 1/2"	1			A36
p169	2	PL1/4"X1"	0'-6 1/2"	1			A36
p186	4	PL3/8"X3"	0'-3 1/2"	4			A36

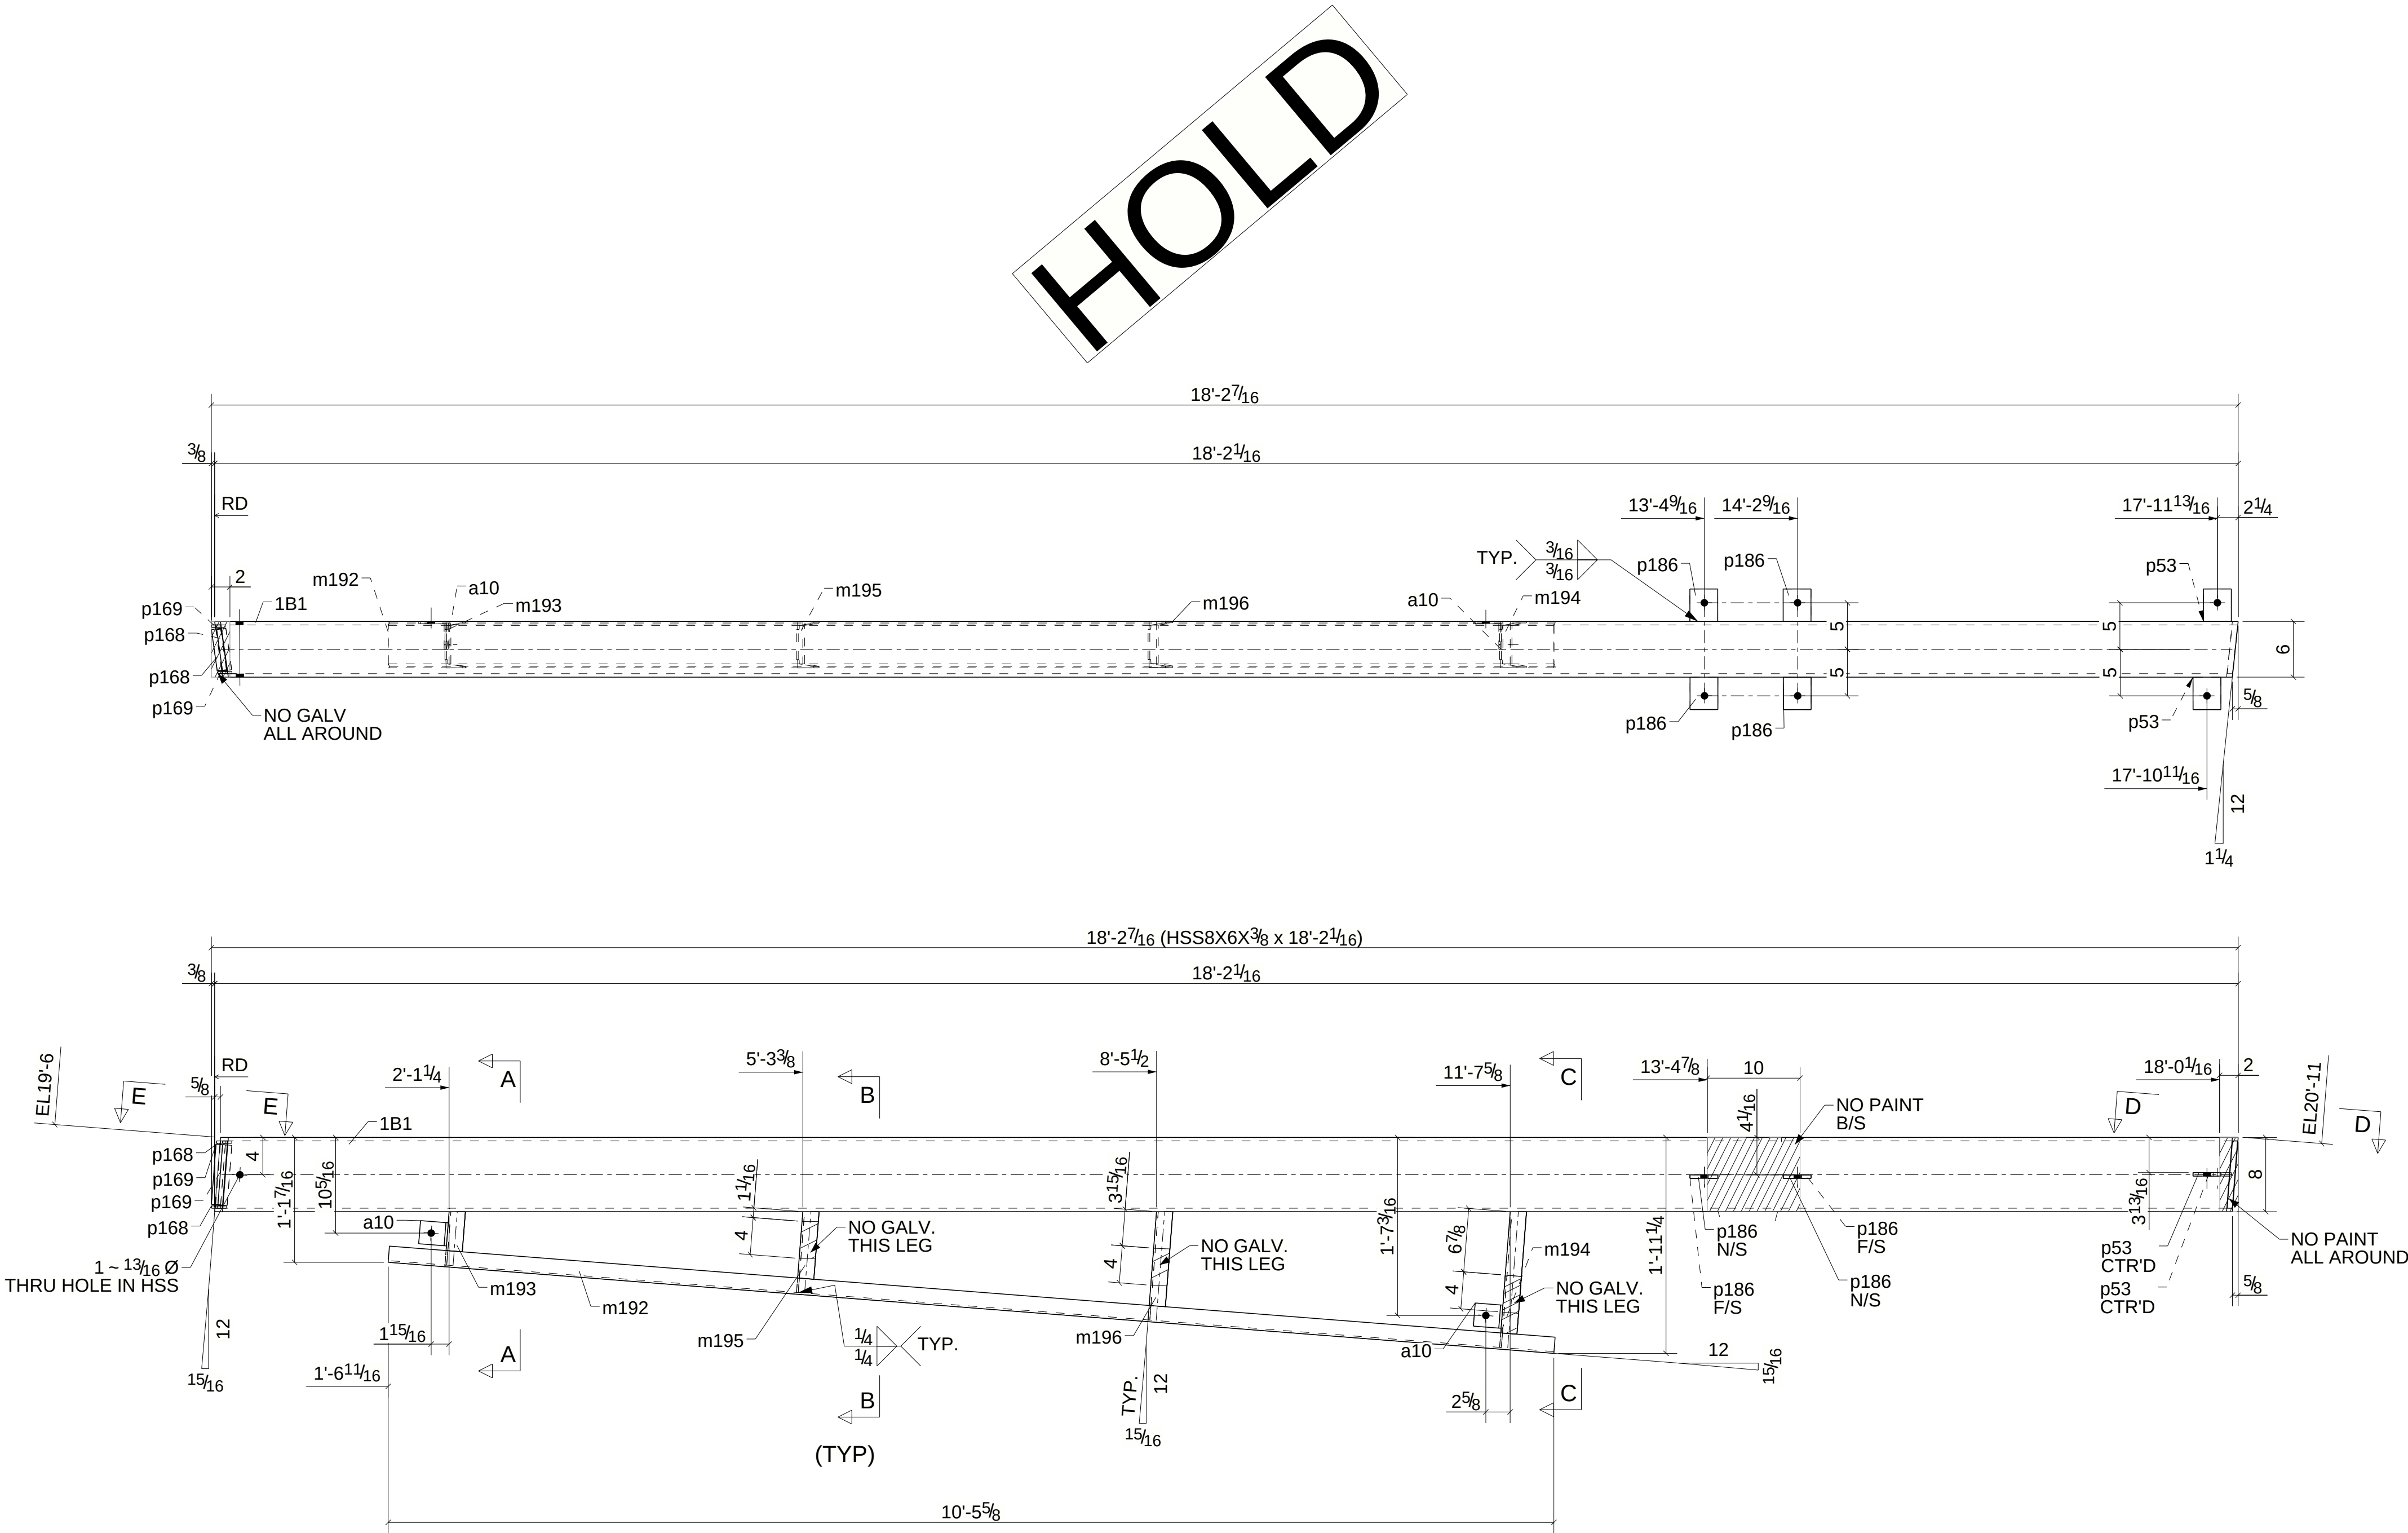

SHOP NOTE:
* CLOUDED PORTION OF STEELS NEED TO BE GALV. SEPRATELY BEFORE WELDING WITH THE HSS BEAM.

FABRICATOR NOTE:
NO PAINT. & MASK HATCHED PORTION WITH TWO PART OF EPOXY BEFORE GALVANIZATION.

GRID LOCATION	BOTTOM ELEVATION
6-5/U.5-X	18'-6"

0	04/11/2025	For Fabrication
B	03/24/2025	For Re. Approval
A	10/16/2024	For Approval
REV.	DATE	DESCRIPTION
MATERIAL A36 UNO		
HOLES 13/16 Ø UNO		
WELDS E70XX		
SURFACE PREP. SSPC SP2		
PAINT NOTE SW SHOP PRIMER (J.NO)		

Building Envelope Systems

20 HIGH STREET
PLAINSVILLE, MA 02762
PHONE (508) 381-0429
www.teambes.com

PROJECT NAME
GSC JUNIPER RBP PHASE-II

LOCATION
PARKWAY EVERETT, MA

CONTRACTOR
BUILDING ENVELOPE SYSTEMS

DWG TITLE
BEAM

DRAWN BY
ABJ

CHECKED BY
HSR

DATE DRAWN
03/24/2025

PLOT DATE
03/24/2025

DGSTS No.

REV.
0

CONTRACT No. 24050

DWG No. 1B1

ONE - BEAM - 1B1