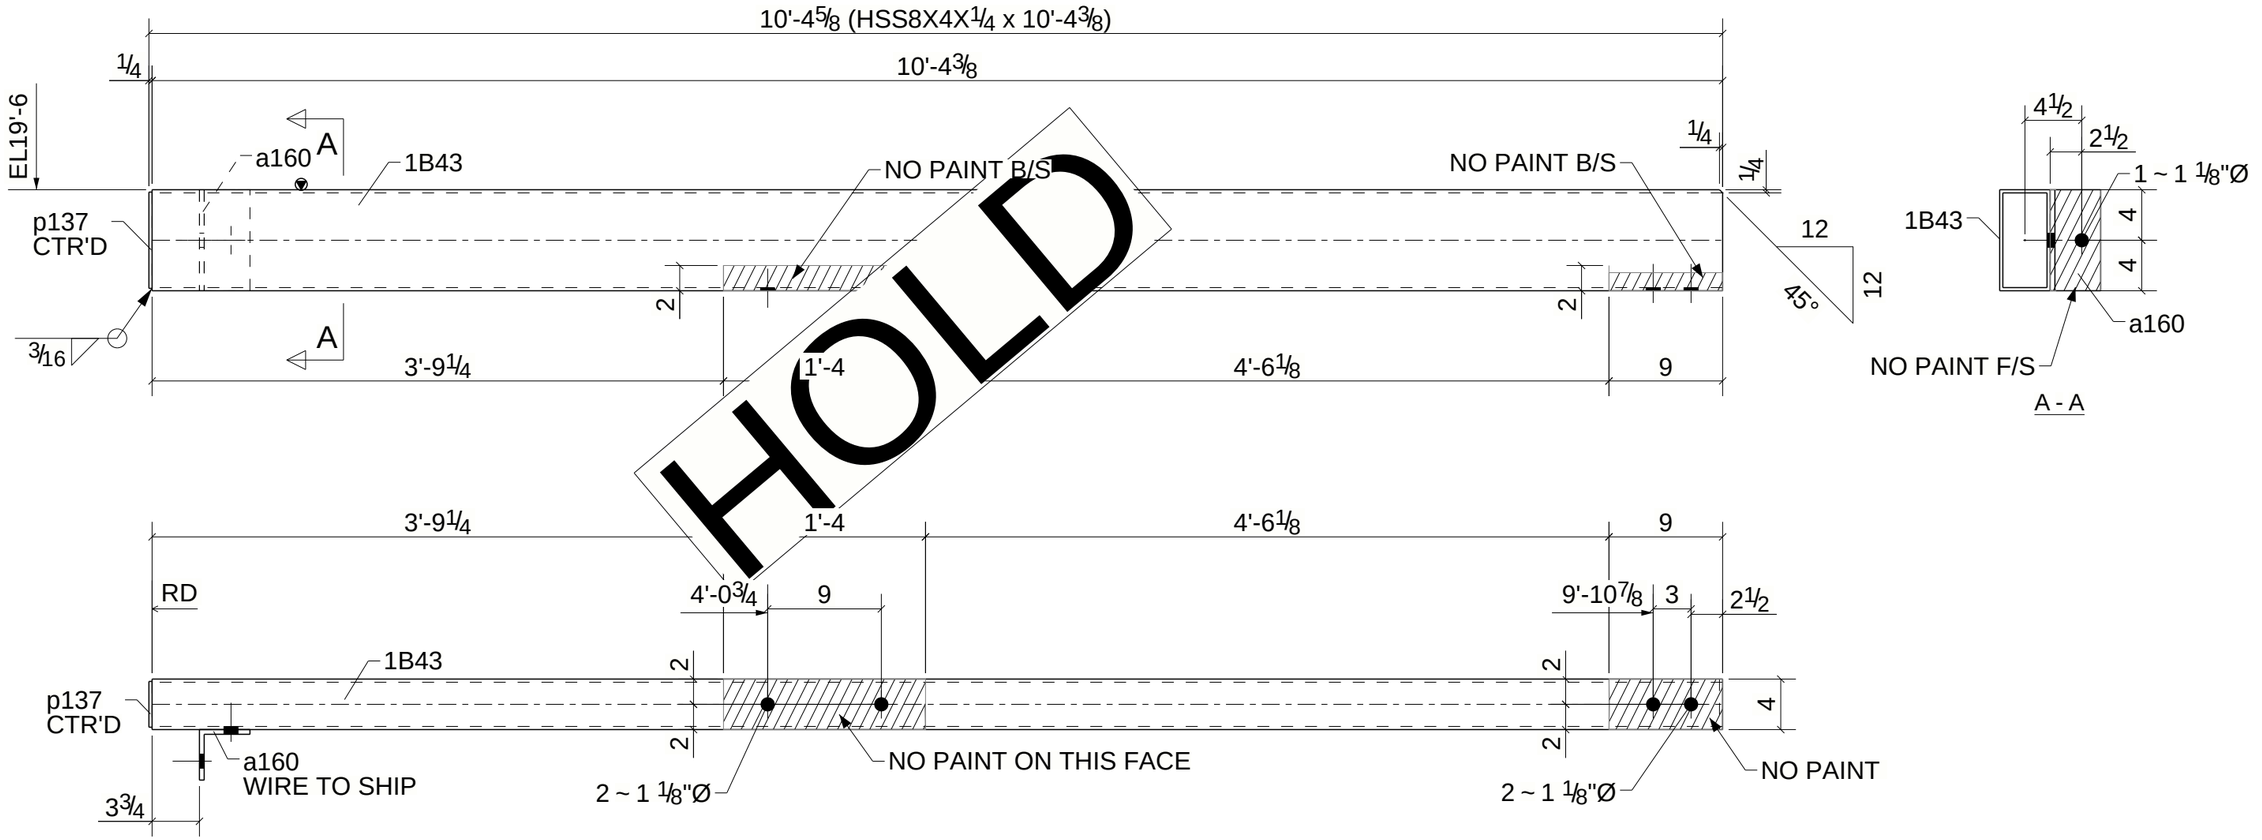

ONE - HSS GIRT - 1B43

BILL OF MATERIAL

MARK	TOTAL QTY	SHAPE	LENGTH	TOTAL WEIGHT	REMARKS	ADV MILL #	STEEL GRADE
1B43	1	HSS8X4X1/4	10'-4 3/8"	185	SQ-2		A500-GR.B
a160	1	L4X4X3/8	0'-8"	6			A36
p137	1	PL1/4"X3 5/8"	0'-7 5/8"	2			A36

Tekla Structures

REV.	DATE	DESCRIPTION
0	04/11/2025	For Fabrication

Building Envelope Systems
20 HIGH STREET
PLAINSVILLE, MA 02762
PHONE (508) 381-0429
www.teambes.com

MATERIAL: A36 UNO
HOLES: 13/16Ø UNO
WELDS: E70XX
SURFACE PREP.: SSPC-SP3
PAINT NOTE : GALV

PROJECT NAME: GSC JUNIPER RBP PHASE-II
LOCATION: PARKWAY EVERETT, MA
CONTRACTOR: BUILDING ENVELOPE SYSTEMS
DWG TITLE: HSS GIRT

DRAWN BY	CHECKED BY	DATE DRAWN	PLOT DATE	DGSTS No.
ABJ	HSR	10/16/2024	10/16/2024	--

CONTRACT No. 24050 | DWG No. 1B43 | REV. 0