


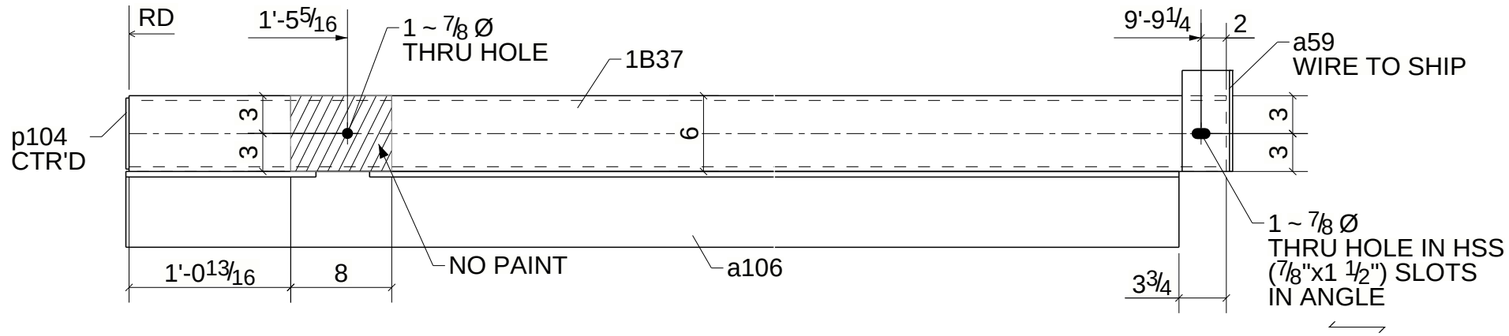


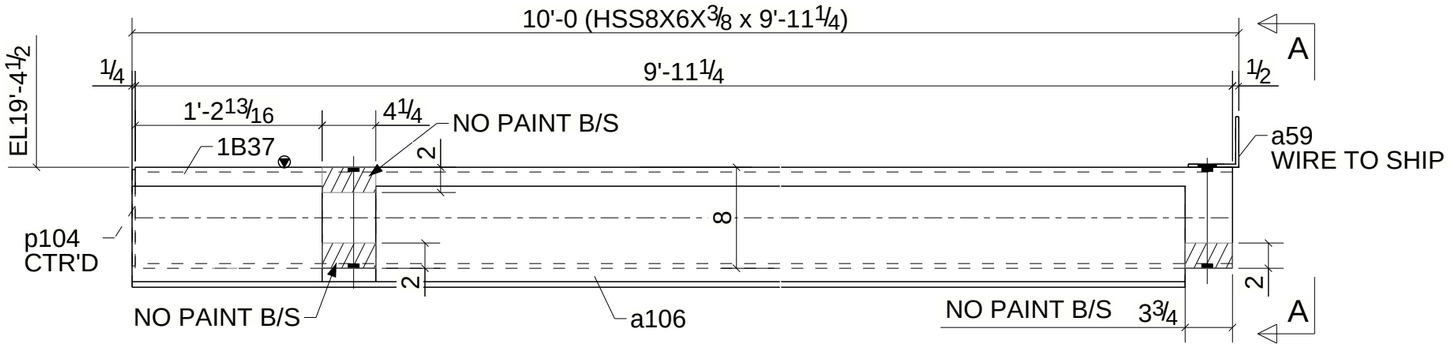

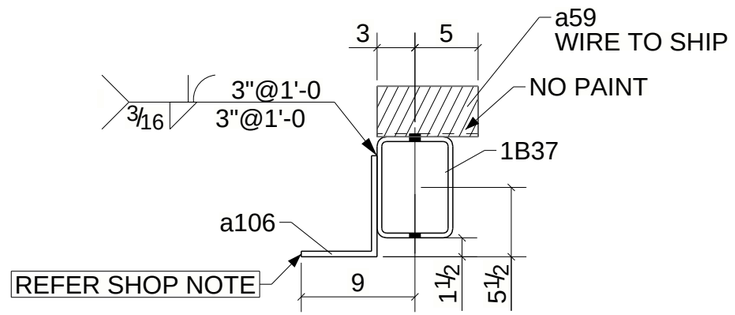

A - A

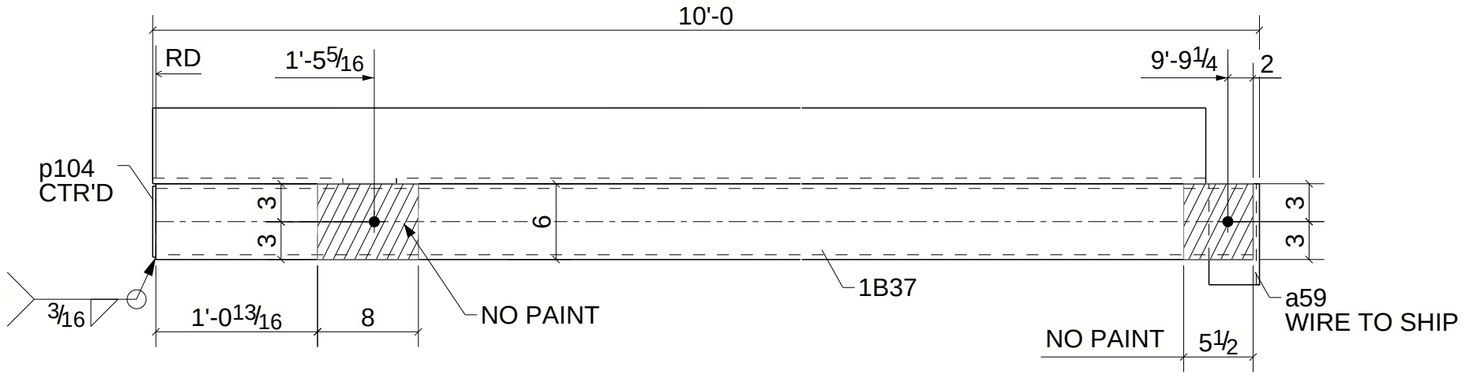

ONE - HSS GIRT - 1B37

SHOP NOTE:

1. SHELF ANGLE SHOULD BE GALV. SEPERATELY BEFORE WELDING TO HSS.(SURFACE PREP : SSPC-SP3

BILL OF MATERIAL

MARK	TOTAL QTY	SHAPE	LENGTH	TOTAL WEIGHT	REMARKS	ADV MILL #	STEEL GRADE
1B37	1	HSS8X6X3/8	9'-11 1/4"	303	SQ-2		A500-GR.B
a59	1	L4X4X1/4	0'-8"	4			A36
a106	1	L8X6X7/16	9'-7 3/4"	197	GALV.		A36
p104	1	PL1/4"X5 5/8"	0'-7 5/8"	3			A36

Tekla Structures

REV.	DATE	DESCRIPTION
0	04/11/2025	For Fabrication
A	10/15/2024	For Approval

Building Envelope Systems
20 HIGH STREET
PLAINSVILLE, MA 02762
PHONE (508) 381-0429
www.teambes.com

MATERIAL: A36 UNO
HOLES: 13/16Ø UNO
WELDS: E70XX
SURFACE PREP.: SSPC SP2
PAINT NOTE : SW SHOP PRIMER (U.N.O)

PROJECT NAME: GSC JUNIPER RBP PHASE-II
LOCATION: PARKWAY EVERETT, MA
CONTRACTOR: BUILDING ENVELOPE SYSTEMS
DWG TITLE: HSS GIRT

DRAWN BY	CHECKED BY	DATE DRAWN	PLOT DATE	DGSTS No.
ABJ	HSR	10/15/2024	10/15/2024	--

CONTRACT No. 24050 | DWG No. 1B37 | REV. 0