


BILL OF MATERIAL

MARK	TOTAL QTY	SHAPE	LENGTH	TOTAL WEIGHT	REMARKS	ADV MILL #	STEEL GRADE
1B47	1	HSS10X2X1/4	19'-3 15/16"	345	BEV-2 GALV		A500-GR.B
p7	2	PL1/4"X1"	0'-8 1/16"	1			A36
p150	1	PL1/4"X3/4"	0'-1"	0			A36
p180	2	PL3/8"X3"	0'-4 1/16"	3			A36
p182	1	PL3/8"X3"	0'-4 1/16"	1			A36

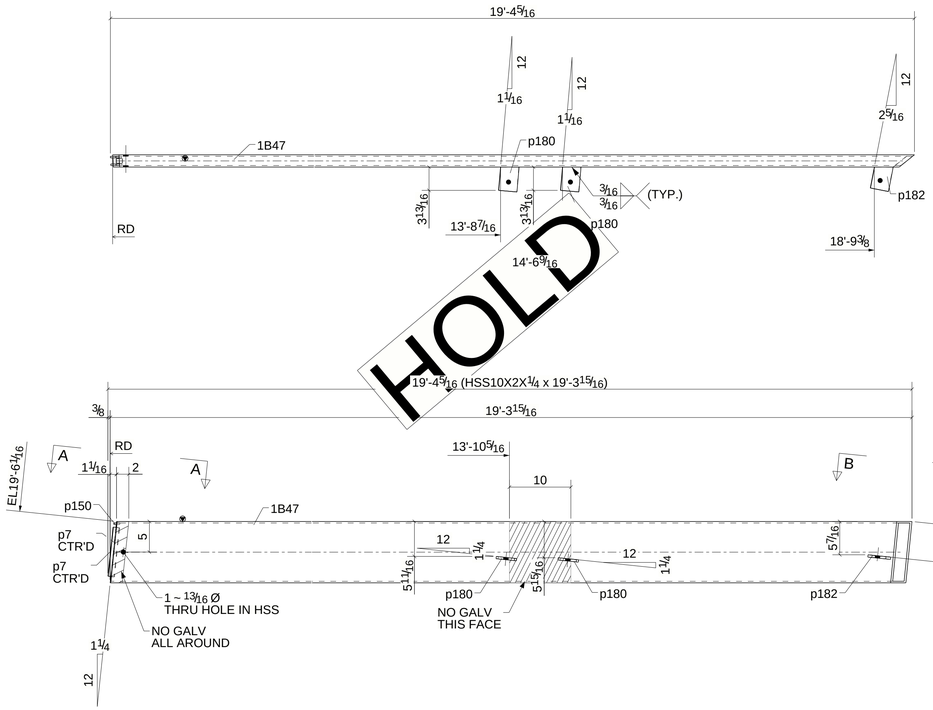



A - A



B - B

FABRICATOR NOTE:

NO GALV. & MASK HATCHED PORTION WITH TWO PART OF EPOXY BEFORE GALVANIZATION.

ONE - BEAM - 1B47

GRID LOCATION	BOTTOM ELEVATION
6-5/U.5-X	18'-8"

Building Envelope Systems
20 HIGH STREET
PLAINSVILLE, MA 02762
PHONE (508) 381-0429
www.teambes.com

REV.	DATE	DESCRIPTION
0	04/11/2025	For Fabrication
A	03/24/2025	For Approval

MATERIAL: A36 UNO	PROJECT NAME: GSC JUNIPER RBP PHASE-II			
HOLES: 13/16Ø UNO	LOCATION: PARKWAY EVERETT, MA			
WELDS: E70XX	CONTRACTOR: BUILDING ENVELOPE SYSTEMS			
	DWG TITLE: BEAM			
SURFACE PREP.: SSPC SP3	DRAWN BY: ABJ	CHECKED BY: HSR	DATE DRAWN: 03/24/2025	PLOT DATE: 03/24/2025
PAINT NOTE : GALVANIZED	CONTRACT No. 24050	DWG No. 1B47		REV. 0

Tekla Structures