

BILL OF MATERIAL

MARK	TOTAL QTY	SHAPE	LENGTH	TOTAL WEIGHT	REMARKS	ADV MILL #	STEEL GRADE
1C16	1	HSS8X6X1/4	19'-2 1/2"	403	SQ-2		A500-GR.B
a56	2	L7X4X3/8	0'-4"	9			A36
a60	3	L4X4X3/8	0'-8"	19			A36
	1	3/4"Ø A325N BOLT	0'-8"	1	Workshop		

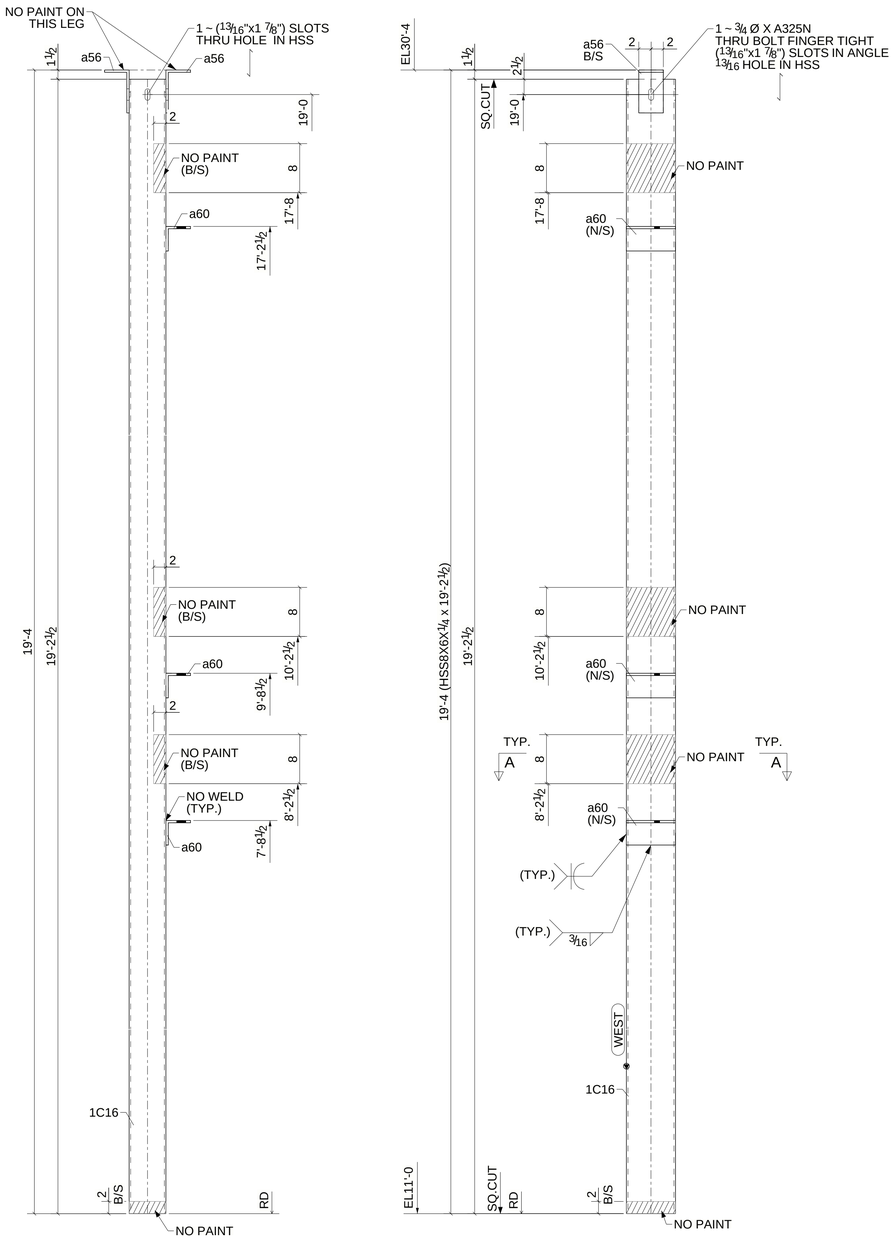

ONE - COLUMN - 1C16



GRID LOCATION	BOTTOM ELEVATION
101/<XX	11'-0"

Building Envelope Systems
20 HIGH STREET
PLAINSVILLE, MA 02762
PHONE (508) 381-0429
www.teambes.com

REV.	DATE	DESCRIPTION
0	04/11/2025	For Fabrication
A	10/16/2024	For Approval

PROJECT NAME: GSC JUNIPER RBP PHASE-II
LOCATION: PARKWAY EVERETT, MA
CONTRACTOR: BUILDING ENVELOPE SYSTEMS
DWG TITLE: COLUMN

MATERIAL	HOLES	WELDS	SURFACE PREP.	PAINT NOTE :
A36 UNO	13/16Ø UNO	E70XX	SSPC SP2	SW SHOP PRIMER

DRAWN BY	CHECKED BY	DATE DRAWN	PLOT DATE	DGSTS No.
ABJ	HSR	10/15/2024	10/15/2024	--

CONTRACT No. 24050 | DWG No. 1C16 | REV. 0

Tekla Structures